




ELAN srl - Cavi e Batterie
 via Osimana, 70 - 60021 Camerano (An) - Italy
 tel. +39.071.7304258 - fax +39.071.7304282
 www.elan.an.it - eMail: info@elan.an.it

COAX CCTV SAT

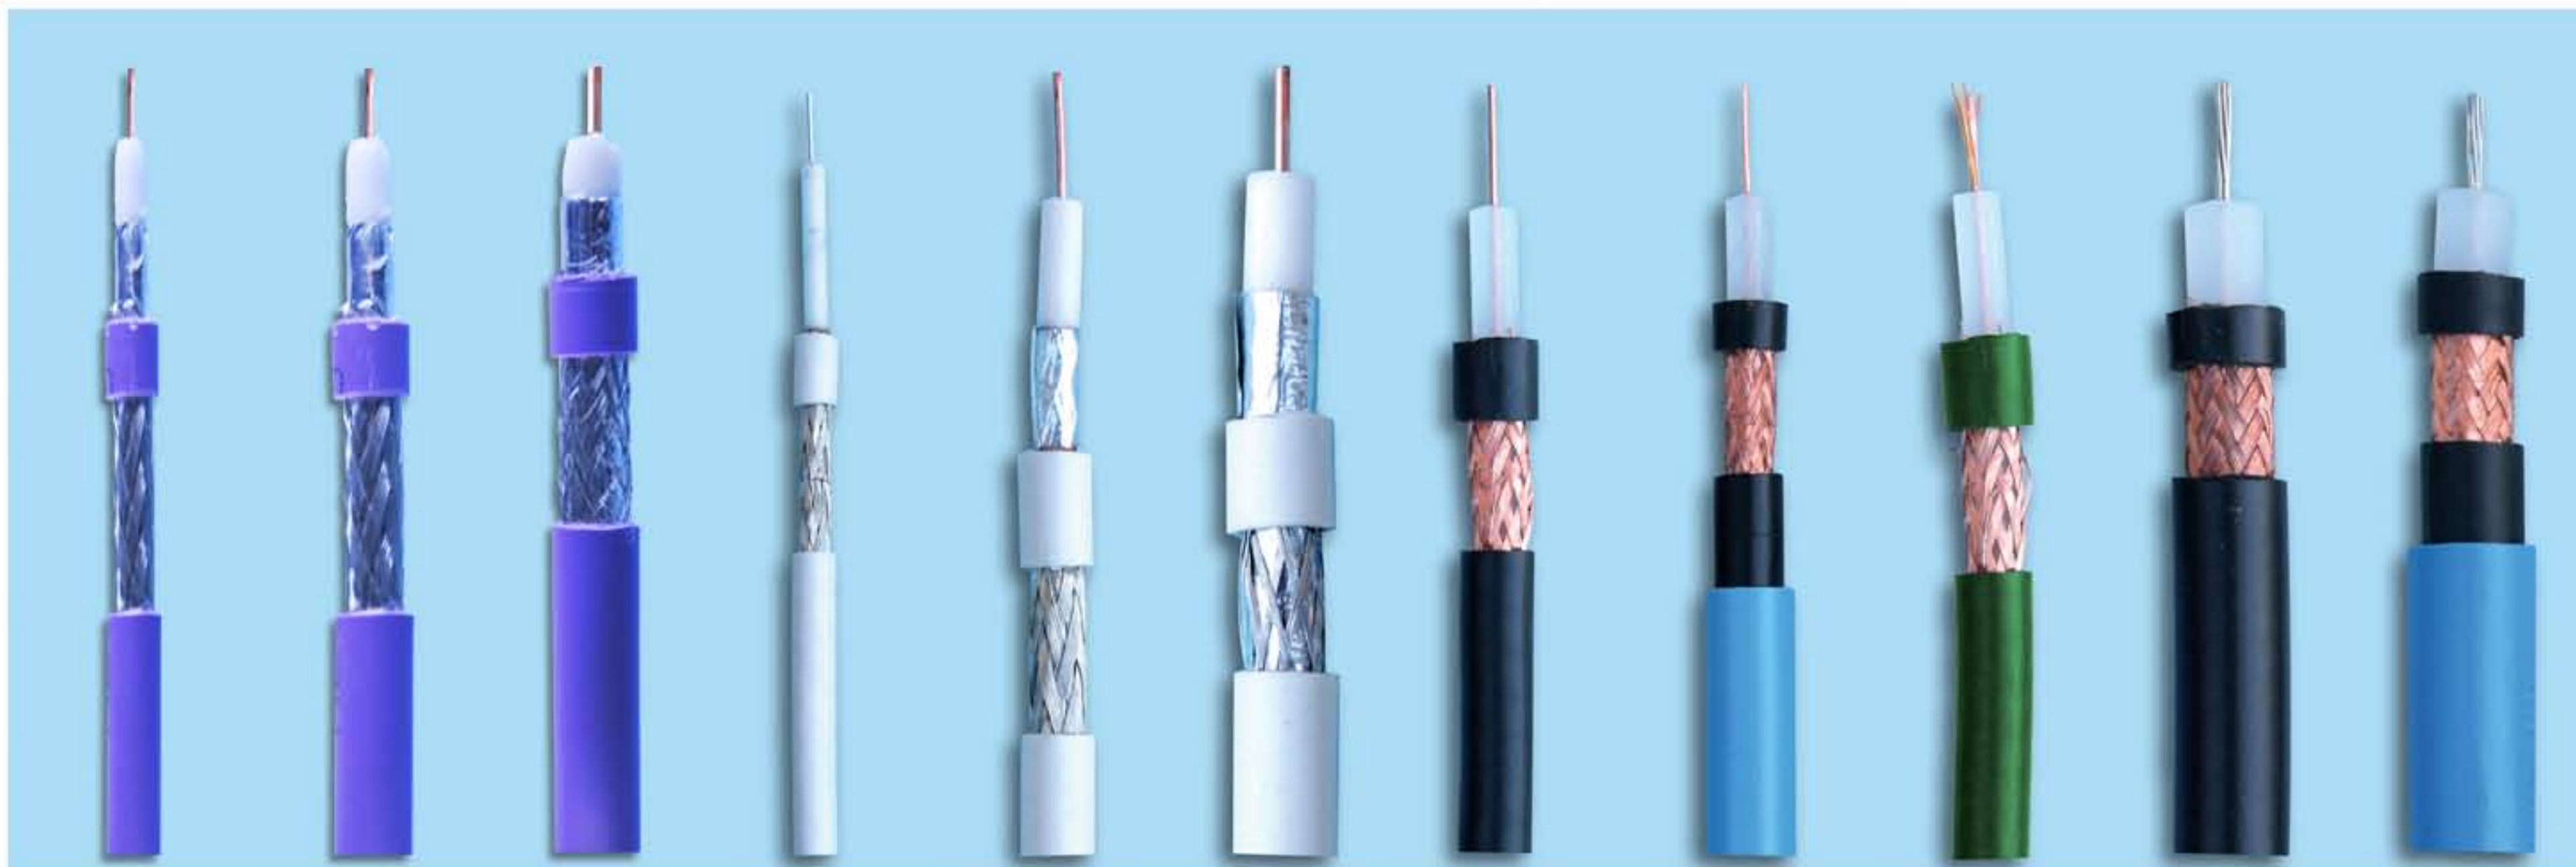

081491 MICROCOAX MCX HD	083591 COAX MINI HD	081061 COAX RG6 HD	081591 MICROCOAX MCX	082591 MINICOAX AL	080061 COAX RG6 AL	080591 RG 59 B/U	084591 RG 59 B/U DOUBLE JACKET	086591 KX6	080110 RG 11 MIL c17	084110 RG 11 MIL c17 DOUBLE JACKET
--------------------------------------	----------------------------------	---------------------------------	-----------------------------------	---------------------------------	---------------------------------	-------------------------------	---	----------------------	-----------------------------------	---

CARATTERISTICHE ELETTRICHE Electrical Characteristics

Impedenza (Ω) Impedance	75	75	75	75	75	75	75	75	75	75	75
Capacità (pF/m) Capacitance	53	53	53	67	52 ± 2	52 ± 2	68	68	68	67	67
Velocità di propagazione (%) Velocity ratio (%)	77%	82	82	≥80%	≥84%	≥85%	≥66%	≥66%	≥66%	≥67%	≥67%
Return Loss (dB) 5-1000 Mhz	>30 dB	>30 dB	>30 dB	>28 dB (1-100MHz)	> 25 dB	>30 dB	>20 dB	>20 dB	>20 dB	>30 dB	>30 dB
Efficienza Schermatura (dB)	A+	A+	A+	-	A	A	-	-	-	-	-
Shielding Effectiveness 30-1000 Mhz	-	-	-	-	> 85 dB	> 75 dB	-	-	-	-	-
Shielding Effectiveness 5-2400 Mhz	>16 dB	> 16 dB	> 16 dB	-	-	-	-	-	-	-	-

ATTENUAZIONE Attenuation MHz (db/100 m)

50	11,60	5,10	3,90	17,00	8,50	4,60	8,59	8,59	8,59	4,20	4,20
200	21,70	11,00	7,70	32,00	15,00	8,70	18,4	18,4	18,4	9,30	9,30
400	32,00	16,20	11,00	53,00	20,30	12,30	27,2	27,2	27,2	13,90	13,90
700	41,50	21,40	14,80	70,00	27,80	16,60	38,0	38,0	38,0	19,50	19,50
1000	49,80	25,40	20,00	-	32,90	20,00	47,0	47,0	47,0	24,20	24,20
1450	61,50	30,20	23,60	-	40,10	24,60	-	-	-	-	-
1800	67,40	36,10	27,00	-	45,40	27,70	-	-	-	-	-
2200	75,30	38,50	30,00	-	50,00	30,70	-	-	-	-	-
3000	80,50	45,00	35,50	-	-	-	-	-	-	-	-

COSTRUZIONE Construction

Conduttore interno Inner Conductor	CU	CU	CU	TC	CW21%	CW23%	CU	CU	CU	TC	TC
Diametro Diameter mm.	0,40	0,64	1,02	0,30	0,64	1,02	0,58	0,58	7X0,20	7X0,40	7X0,40
Isolamento Insulation	PEE	PEE	PEE	PEE	PEE	PEE	PE	PE	PE	PE	PE
Diametro Diameter mm.	1,90	2,90	4,70	1,60	2,90	4,70	3,70	3,70	3,70	7,25	7,25
Schermo Shield	AL/Foil+CU	AL/Foil+CU	AL/Foil+CU	TC	AL/Foil+AL	AL/Foil+AL	CCA	CCA	CCA	CU	CU
Treccia Braid	96X0,11 TC	112X0,11 TC	120X0,12 TC	80X0,10 TC	112X0,12 AL	64X0,12 AL	112X0,12 CCA	112X0,12 CCA	112X0,12 CCA	240X0,15	240X0,15 CU
Perc.di copertura Coverage Area	> 95%	> 95%	> 95%	>90%	>90%	>45%	>90%	>90%	>90%	>97%	>97%
Guaina esterna Jacket	LSZH	LSZH	LSZH	PVC	PVC	PVC	PVC	double PVC	PVC	PVC	double PVC
Colore Colour	purple	purple	purple	white	white	white	black	blue	green	black	blue
Diametro Diameter mm.	3,10±0,1	4,80±0,1	6,80±0,1	2,80±0,1	4,80±0,1	6,80±0,1	6,2±0,1	7,8±0,1	6,2±0,1	10,3±0,1	11,9±0,1

PE: Polyethylene PEE: Foamed Polyethylene AL: Aluminium TC: Tinned copper (Rame stagn.) CU: Bare copper (Rame rosso) CW: Copperweld (Acciaio ramato)