
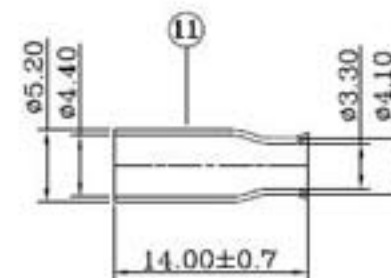




ROHS Compliant

408060


## REVISIONS

RevNo	Description	Date	Revision	Mender
1	SHELL MATERIAL:ZINC	2012/09/06	A2	CKQ
2	Change size $\phi 3.0$ to $\phi 3.30, \phi 3.80$ to $\phi 4.10$	2012/12/21	A3	CKQ
3	Change ferrule	2013/02/26	A4	CKQ

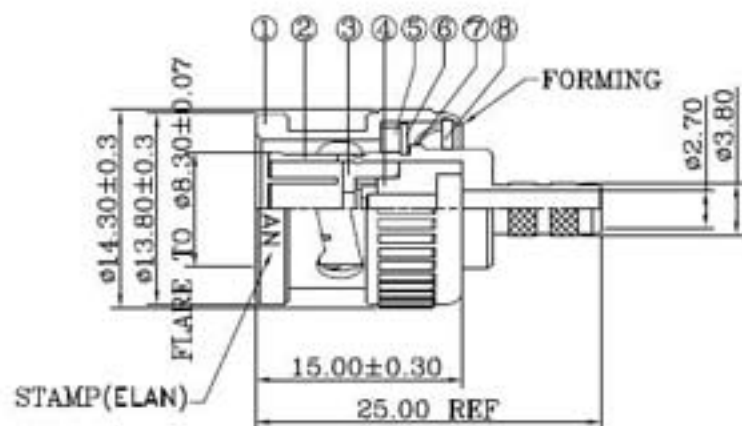

## NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)

- BRASS PER QQ-B-626
- NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- NICKEL PL.200 MIN. THICK OVER COPPER STRIKE
- GOLD PL.3 MIN THICK OVER NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- JIS H 3250,C 2700



RECOMMENDED  
CABLE STRIPPING DIM'S

- CRIMPED FERRULE  
HEX CRIMP SIZE .178"
- CRIMPED CONTACT PIN  
HEX CRIMP SIZE .068"

"Merce non prodotta in UE" - "Goods are not produced in UE"

ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED
11	FERRULE	NOTE 5	1	NOTE 2
10	INSULATOR	POM	1	NATURAL
9	CONTACT PIN	NOTE 1	1	NOTE 4
8	WASHER	IRON	1	NOTE 2
7	SPRING	SK5	1	NOTE 3
6	RETAINER RING	65Mn	1	NOTE 2
5	GASKET	RUBBER	1	RED
4	INSULATOR	POM	1	NATURAL
3	INSULATOR	POM	1	NATURAL
2	BODY	NOTE 1	1	NOTE 2
1	SHELL	ZINC	1	NOTE 2

ELAN  
CAVI E BATTERIE



TITLE  
BNC CRIMP PLUG 75 OHMS  
(FOR Micro Coax ELAN)

DRAWING NO.	UNITS	MM	SCALE	FIT	DESIGNED	Ckq
MODEL NO.	UNLESS OTHERWISE SPECIFIED		TOLERANCES:		DRAWING	Ckq
PART NO.	EDITION	A1	PUBLISH DATE		CHECKED	
CAD FILE			2012/06/18		APPROVED	

3RD ANGLE