ROHS Compliant | 408080

REVISIONS				
RevNo	Description	Date	Revision	Mender
1	Change design for guest's cable	2012/08/06	A2	CKQ
2	SHELL MATERIAL:ZINC	2012/09/06	A3	CKQ
3	Change design for guest's drawing	2012/10/31	A4	CKQ

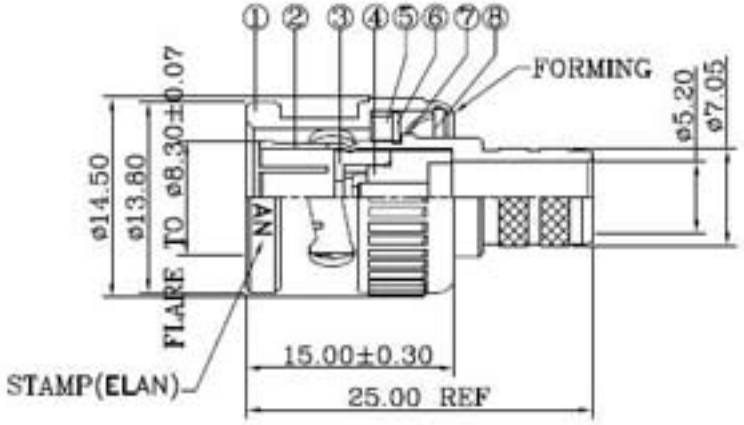



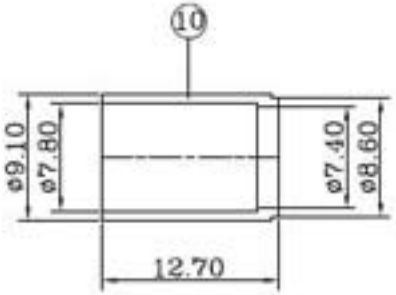

NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)

1.BRASS PER QQ-B-626
2.NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
3.NICKEL PL.200 MIN. THICK OVER COPPER STRIKE
4.GOLD PL.3 MIN THICK OVER NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
5.JIS H 3250,C 2700

ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED
10	FERRULE	NOTE 5	1	NOTE 2
9	CONTACT PIN	NOTE 1	1	NOTE 4
8	WASHER	IRON	1	NOTE 2
7	SPRING	SK5	1	NOTE 3
6	RETAINER RING	65Mn	1	NOTE 2
5	GASKET	RUBBER	1	RED
4	INSULATOR	POM	1	NATURAL
3	INSULATOR	POM	1	NATURAL
2	BODY	NOTE 1	1	NOTE 2
1	SHELL	ZINC	1	NOTE 2

1.CRIMPED FERRULE
HEX CRIMP SIZE .319"
2.CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"



RECOMMENDED
CABLE STRIPPING DIM'S

"Merce non prodotta in UE" - "Goods are not produced in UE"

ELAN
CAVI E BATTERIE
www.elan.an.it

TITLE
BNC CRIMP PLUG 75 OHMS
(FOR RG6U CABLE)

		UNITS	MM
DRAWING NO.		SCALE	FIT
MODEL NO.			
PART NO.		EDITION	A1
CAD FILE			

UNLESS OTHERWISE SPECIFIED
TOLERANCES:
0.5-6 = ±0.20
6-30 = ±0.40
30-120 = ±0.60
120-315 = ±1.00
315-1000 = ±1.6
1000-2000 = ±2.4
ANGLES ±5°

PUBLISH DATE
2012/06/18

DESIGNED	Ckq
DRAWING	Ckq
CHECKED	
APPROVED	

3RD ANGLE